


# GALVANIZED STEEL DISTRIBUTION DEAD ENDS



Designed for use on: ACSR, All-Aluminum, Compacted ACSR,  
Compacted All-Aluminum, Aluminum Alloy

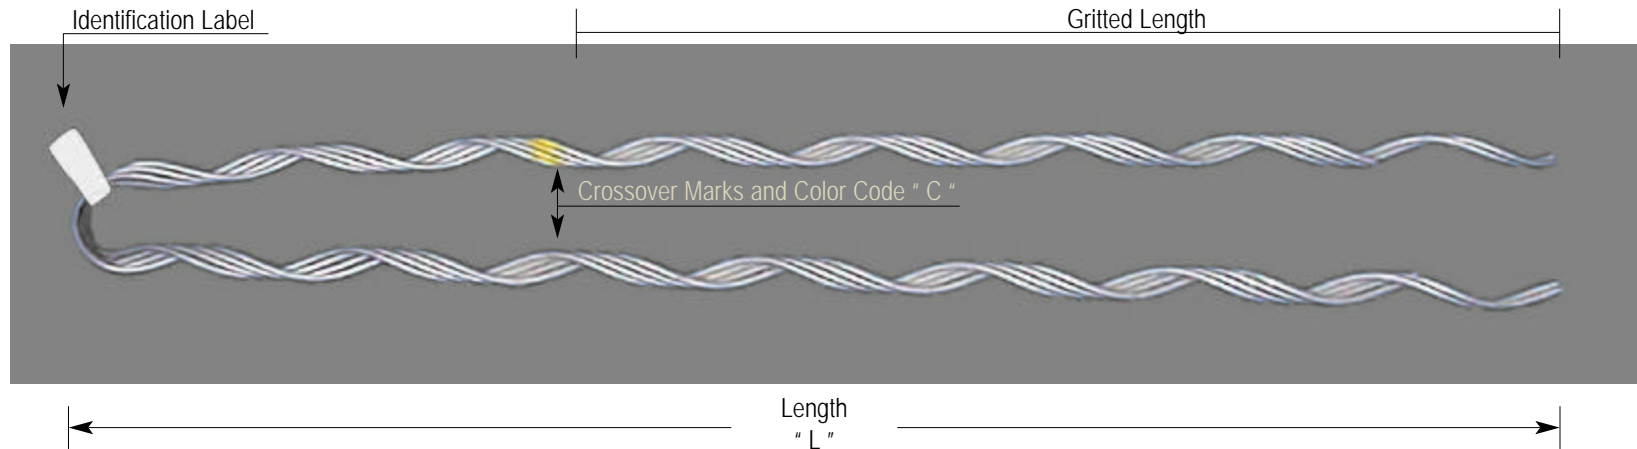


Catalog Number	Diameter Range (inches)		Holding Strength (Lbs) Per Conductor Construction										Properties		Packaging per box		
	Min	Max	ACSR		All Aluminum		Aluminum Alloy		Compacted ACSR		Compacted All-Aluminum		Color "C"	Length (inches) "L"	Units	Weight (Lbs)	
			Type	MBS (Lbs)	Type	MBS (Lbs)	Type	MBS (Lbs)	Type	MBS (Lbs)	Type	MBS (Lbs)					
30010	0.182	0.203	#6	6/1	971	7W	-	7W	-	6/1	-	-	-	BLUE	19	100	16
30012	0.229	0.257	#4	6/1	1519	7W	-	7W	-	6/1	-	-	-	ORANGE	22	100	17
30015	0.29	0.325	#2	6/1	2316	7W	-	7W	-	6/1	-	-	-	RED	24	100	24
30016	0.326	0.364	#1	6/1	2888	7W	-	7W	-	6/1	-	-	-	GREEN	26	100	26
30020	0.365	0.409	1/0	6/1	3552	7W	-	7W	-	6/1	-	-	-	YELLOW	26	50	26
30022	0.41	0.46	2/0	6/1	4062	7W	-	7W	-	6/1	-	-	-	BLUE	31	50	28
30030	0.461	0.516	3/0	6/1	4806	7W	-	7W	-	6/1	-	-	-	ORANGE	35	50	32
30033	0.517	0.577	4/0	6/1	5557	7W	-	7W	-	6/1	-	-	-	RED	37	25	34
30040	0.578	0.653	266.8	18/1	5464	19W	-	19W	-	18/1	-	-	-	BLACK	39	25	35



# ALUMINUM DISTRIBUTION DEAD ENDS



Designed for use on: ACSR, All-Aluminum, Compacted ACSR,  
Compacted All-Aluminum

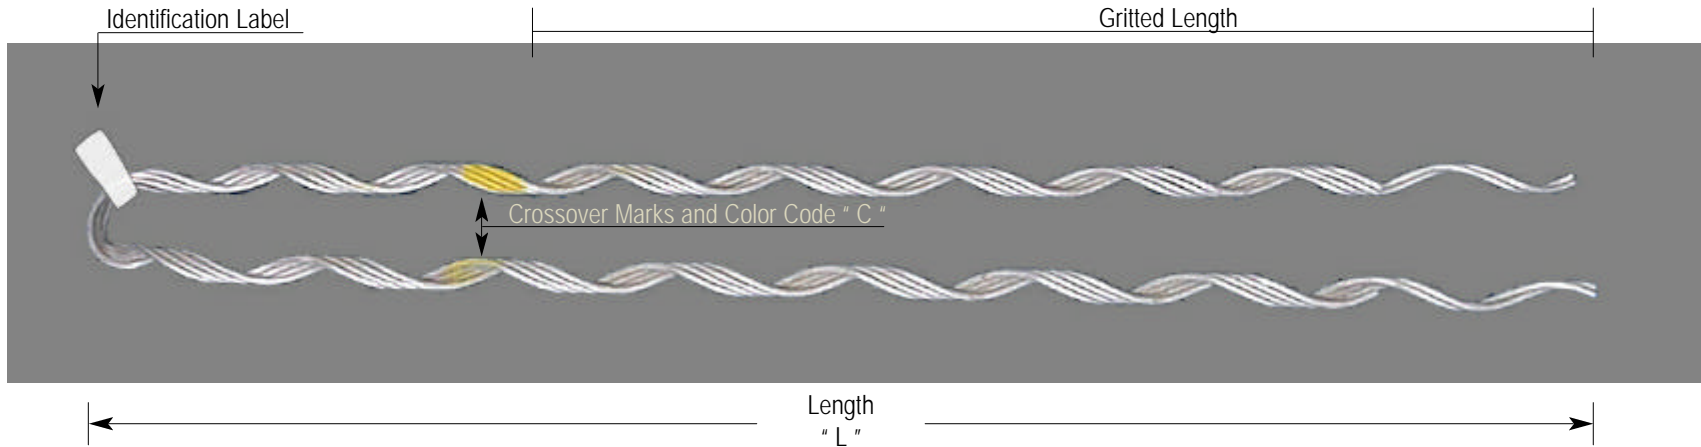


Catalog Number	Diameter Range (inches)		Ultimate Breaking Strength (UBS)	Conductor Type and Construction				Properties		Packaging per box	
	Min	Max		UBS (Lbs)	ACSR	All Aluminum	Compacted ACSR	Compacted All-Aluminum	Color " C "	Length (inches) " L "	Units
31010	0.182	0.201	1655	#6,6/1	#6 7W	#6 6/1		BLUE	19	100	10
31012	0.232	0.26	2483	#4 6/1, #4 7/1	#4 7w	#4 6/1		ORANGE	22	50	8
31015	0.309	0.325	3311	#2 6/1, #2 7/1				RED	24	50	11
31016	0.326	0.355	3311	#1 6/1	#1 7w, #1 19W	#1 6/1		GREEN	26	50	13
31020	0.365	0.398	4139	1/0 6/1	1/0 7w, 1/0 19W	1/0 6/1	2/0 7W	YELLOW	26	50	17
31022	0.41	0.447	4967	2/0 6/1	2/0 7w, 2/0 19W	2/0 6/1	3/0 7W, 3/0 19W	BLUE	31	50	22
31030	0.492	0.522	6026	3/0 6/1	3/0 12W, 4/0 7W	4/0 6/1		ORANGE	35	25	15
31033	0.542	0.563	6026	4/0 6/1	4/0 12W	266.8 18/1		RED	37	25	16
31040	0.586	0.609	7684	266.8 18/1	266.8 19w	336.4 18/1		BLACK	39	25	20



# ALUMINUM CLAD STEEL DISTRIBUTION DEAD ENDS



Designed for use on: ACSR, All-Aluminum, Compacted ACSR,  
Compacted All-Aluminum, AWAC

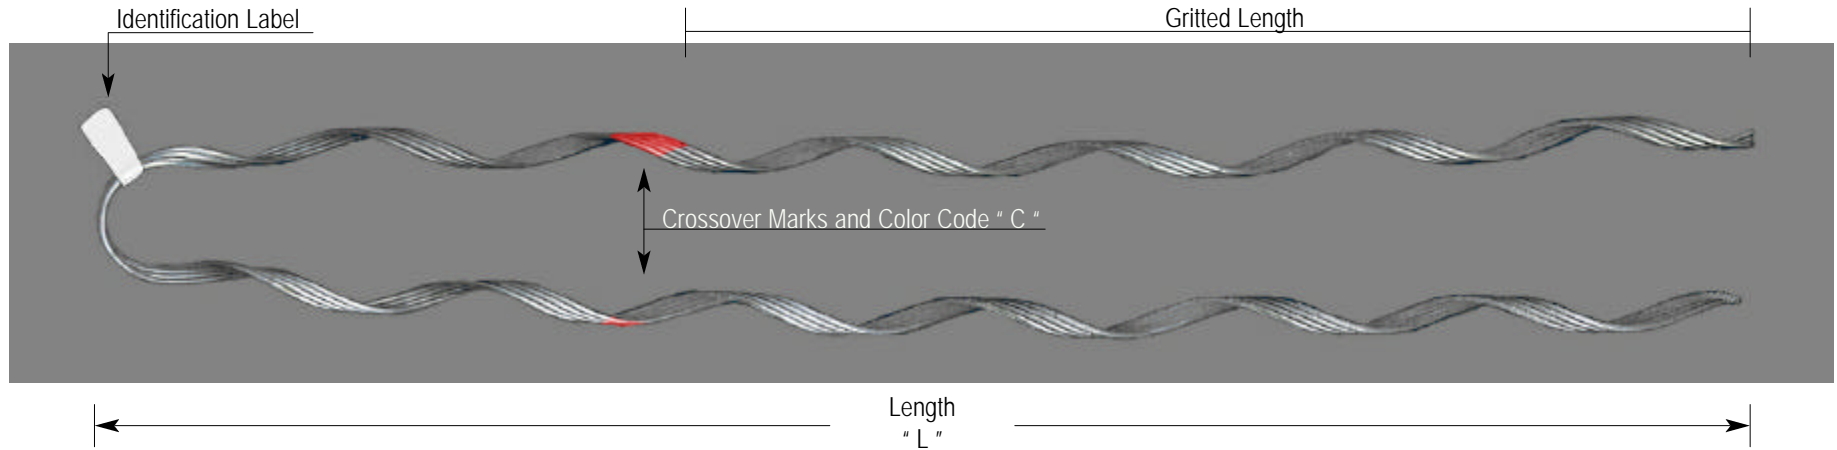

Catalog Number	Diameter Range (inches)		Holding Strength (Lbs) Per Conductor Construction										Properties		Packaging per box		
	Min	Max	ACSR		All Aluminum		Aluminum Alloy		Compacted ACSR		Compacted All-Aluminum		Color " C "	Length (inches) " L "	Units	Weight (Lbs)	
			Type	MBS (Lbs)	Type	MBS (Lbs)	Type	MBS (Lbs)	Type	MBS (Lbs)	Type	MBS (Lbs)					
32010	0.182	0.203	#6	6/1	971	7W	-	7W	-	6/1	-	-	-	BLUE	14	100	16
32012	0.229	0.257	#4	6/1	1519	7W	-	7W	-	6/1	-	-	-	ORANGE	20	100	17
32015	0.29	0.325	#2	6/1	2316	7W	-	7W	-	6/1	-	-	-	RED	24	100	33
32016	0.326	0.364	#1	6/1	2888	7W	-	7W	-	6/1	-	-	-	GREEN	26	100	44
32020	0.365	0.409	1/0	6/1	3552	7W	-	7W	-	6/1	-	-	-	YELLOW	26	50	31
32022	0.41	0.46	2/0	6/1	4062	7W	-	7W	-	6/1	-	-	-	BLUE	28	50	35
32030	0.461	0.516	3/0	6/1	4806	7W	-	7W	-	6/1	-	-	-	ORANGE	32	50	42
32033	0.517	0.577	4/0	6/1	5557	7W	-	7W	-	6/1	-	3/0-6/1	6605	RED	34	25	30
32040	0.578	0.653	266.8	18/1	5464	19W	-	19W	-	18/1	-	-	-	BLACK	35	25	39

