


GALVANIZED STEEL DISTRIBUTION DEAD ENDS



Designed for use on: ACSR, All-Aluminum, Compacted ACSR,
Compacted All-Aluminum, Aluminum Alloy

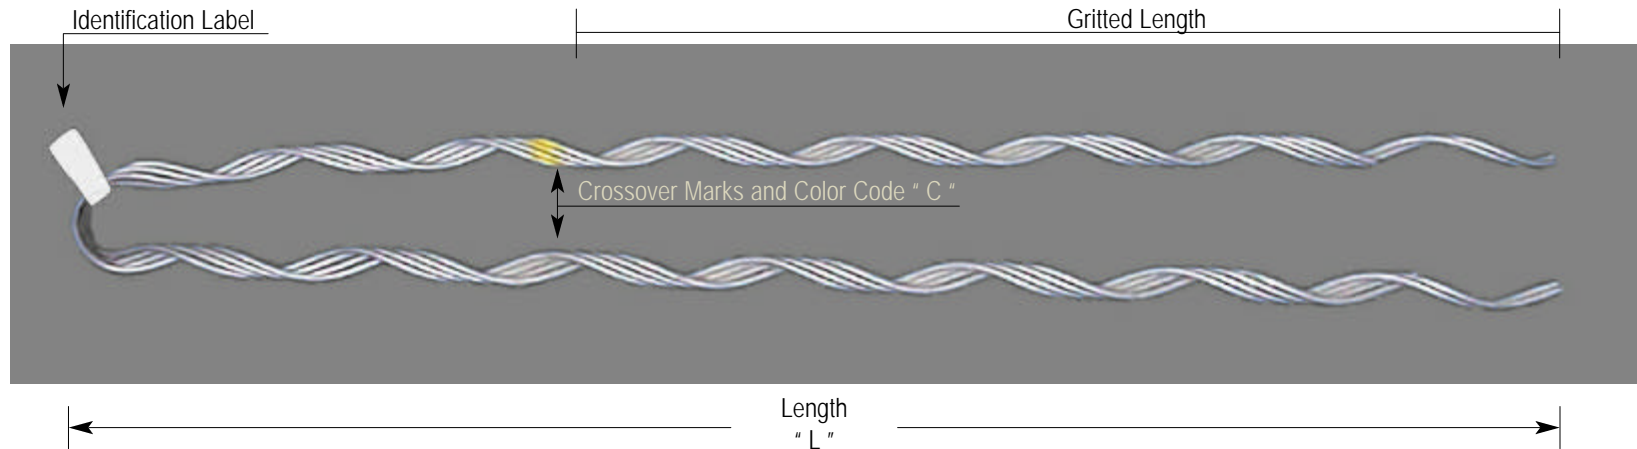

Catalog Number	Diameter Range (inches)		Holding Strength (Lbs) Per Conductor Construction										Properties		Packaging per box	
	Min	Max	ACSR		All Aluminum		Aluminum Alloy		Compacted ACSR		Compacted All-Aluminum		Color "C"	Length (inches) "L"	Units	Weight (Lbs)
			Type	MBS (Lbs)	Type	MBS (Lbs)	Type	MBS (Lbs)	Type	MBS (Lbs)	Type	MBS (Lbs)				
30010	0.182	0.203	#6 6/1	971	7W	-	7W	-	6/1	-	-	-	BLUE	19	100	16
30012	0.229	0.257	#4 6/1	1519	7W	-	7W	-	6/1	-	-	-	ORANGE	22	100	17
30015	0.29	0.325	#2 6/1	2316	7W	-	7W	-	6/1	-	-	-	RED	24	100	24
30016	0.326	0.364	#1 6/1	2888	7W	-	7W	-	6/1	-	-	-	GREEN	26	100	26
30020	0.365	0.409	1/0 6/1	3552	7W	-	7W	-	6/1	-	-	-	YELLOW	26	50	26
30022	0.41	0.46	2/0 6/1	4062	7W	-	7W	-	6/1	-	-	-	BLUE	31	50	28
30030	0.461	0.516	3/0 6/1	4806	7W	-	7W	-	6/1	-	-	-	ORANGE	35	50	32
30033	0.517	0.577	4/0 6/1	5557	7W	-	7W	-	6/1	-	-	-	RED	37	25	34
30040	0.578	0.653	266.8 18/1	5464	19W	-	19W	-	18/1	-	-	-	BLACK	39	25	35


GALVANIZED STEEL DISTRIBUTION DEAD ENDS

Catalog Number	Diameter Range (inches)		Holding Strength (Lbs) Per Conductor Construction										Properties		Packaging per box	
	Min	Max	ACSR		All Aluminum		Aluminum Alloy		Compacted ACSR		Compacted All-Aluminum		Color " C "	Length (inches) " L "	Units	Weight (Lbs)
			Type	MBS (Lbs)	Type	MBS (Lbs)	Type	MBS (Lbs)	Type	MBS (Lbs)	Type	MBS (Lbs)				
30060	0.654	0.739	336.4 18/1	6904	19W	-	19W	-	18/1	-	-	-	GREEN	44	25	39
30065	0.74	0.837	397.5 18/1	8024	19W	-	19W	-	18/1	-	-	-	ORANGE	50	10	50
30070	0.838	0.947	636 18/1	12272	37W	-	19W	-	18/1	-	-	-	BLUE	55	10	55
30080	0.948	1.071	666.6 36/1	11280	37W	-	37W	-	-	-	-	-	BROWN	62	5	60
30090	1.072	1.212	874.5 36/1	14320	61W	-	37W	-	-	-	-	-	ORANGE	70	5	70

ALUMINUM DISTRIBUTION DEAD ENDS



Designed for use on: ACSR, All-Aluminum, Compacted ACSR,
Compacted All-Aluminum

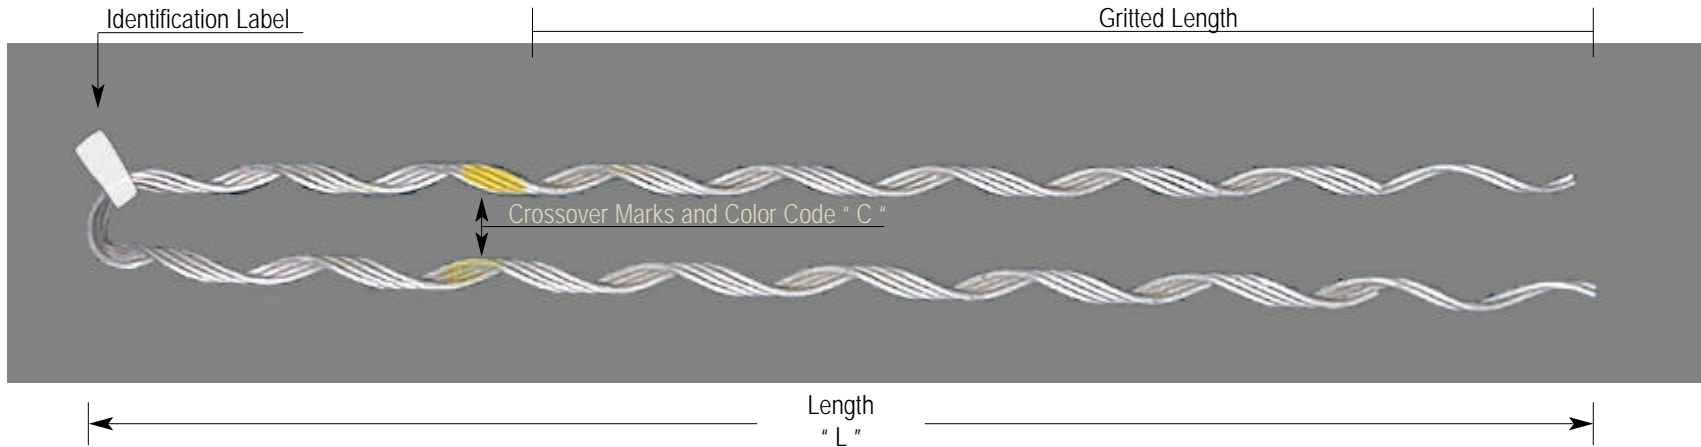

Catalog Number	Diameter Range (inches)		Ultimate Breaking Strength (UBS)	Conductor Type and Construction				Properties		Packaging per box	
	Min	Max		UBS (Lbs)	ACSR	All Aluminum	Compacted ACSR	Compacted All-Aluminum	Color " C "	Length (inches) " L "	Units
31010	0.182	0.201	1655	#6,6/1	#6 7W	#6 6/1		BLUE	19	100	10
31012	0.232	0.26	2483	#4 6/1, #4 7/1	#4 7w	#4 6/1		ORANGE	22	50	8
31015	0.309	0.325	3311	#2 6/1, #2 7/1				RED	24	50	11
31016	0.326	0.355	3311	#1 6/1	#1 7w, #1 19W	#1 6/1		GREEN	26	50	13
31020	0.365	0.398	4139	1/0 6/1	1/0 7w, 1/0 19W	1/0 6/1	2/0 7W	YELLOW	26	50	17
31022	0.41	0.447	4967	2/0 6/1	2/0 7w, 2/0 19W	2/0 6/1	3/0 7W, 3/0 19W	BLUE	31	50	22
31030	0.492	0.522	6026	3/0 6/1	3/0 12W, 4/0 7W	4/0 6/1		ORANGE	35	25	15
31033	0.542	0.563	6026	4/0 6/1	4/0 12W	266.8 18/1		RED	37	25	16
31040	0.586	0.609	7684	266.8 18/1	266.8 19w	336.4 18/1		BLACK	39	25	20


ALUMINUM DISTRIBUTION DEAD ENDS

Catalog Number	Diameter Range (inches)		Ultimate Breaking Strength (UBS)	Conductor Type and Construction				Properties		Packaging per box	
	Min	Max	UBS (Lbs)	ACSR	All Aluminum	Compacted ACSR	Compacted All-Aluminum	Color "C"	Length (inches) "L"	Units	Weight (Lbs)
31050	0.685	0.735	10053	336.4 18/1	336.4 19W	397.5 18/1	397.5 19W	GREEN	44	25	30
31060	0.736	0.814	11729	397.5 18/1, 477 36/1, 477 18/1	450 19W, 477 19W, 500 37W	477 18/1	556 19W,	ORANGE	50	25	40
31065	0.846	0.862	13405	477 24/7, 477 26/7	550 37w, 550 61w, 556.5 61w			RED	53	10	20
31070	0.87	0.94	16473	556.5 36/1, 605 36/1, 636 18/1	636 37W, 650 61W	636 18/1	795 19W	BLUE	55	10	26
31080	0.953	1.04	18826	666.6 36/1, 715.5 36/1, 795 36/1	715.5 37W, 750 61W, 795 61W		874.5 37W, 954 37W	BROWN	62	10	34
31090	1.091	1.212	24740	874.5 36/1, 954 36/1, 1033.5 36/1	874.5 61W, 954 61W, 1033.5 61W			ORANGE	70	10	50

ALUMINUM CLAD STEEL DISTRIBUTION DEAD ENDS



Designed for use on: ACSR, All-Aluminum, Compacted ACSR,
Compacted All-Aluminum, AWAC

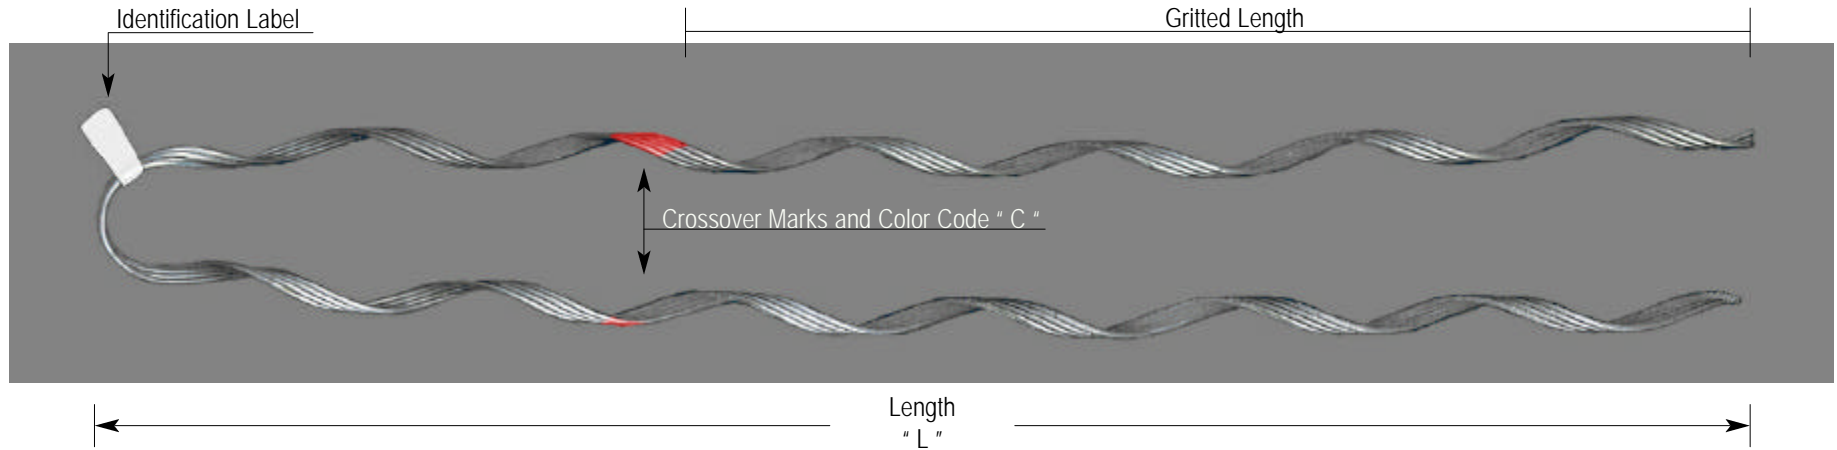

Catalog Number	Diameter Range (inches)		Holding Strength (Lbs) Per Conductor Construction										Properties		Packaging per box	
	Min	Max	ACSR		All Aluminum		Aluminum Alloy		Compacted ACSR		Compacted All-Aluminum		Color " C "	Length (inches) " L "	Units	Weight (Lbs)
			Type	MBS (Lbs)	Type	MBS (Lbs)	Type	MBS (Lbs)	Type	MBS (Lbs)	Type	MBS (Lbs)				
32010	0.182	0.203	#6 6/1	971	7W	-	7W	-	6/1	-	-	-	BLUE	14	100	16
32012	0.229	0.257	#4 6/1	1519	7W	-	7W	-	6/1	-	-	-	ORANGE	20	100	17
32015	0.29	0.325	#2 6/1	2316	7W	-	7W	-	6/1	-	-	-	RED	24	100	33
32016	0.326	0.364	#1 6/1	2888	7W	-	7W	-	6/1	-	-	-	GREEN	26	100	44
32020	0.365	0.409	1/0 6/1	3552	7W	-	7W	-	6/1	-	-	-	YELLOW	26	50	31
32022	0.41	0.46	2/0 6/1	4062	7W	-	7W	-	6/1	-	-	-	BLUE	28	50	35
32030	0.461	0.516	3/0 6/1	4806	7W	-	7W	-	6/1	-	-	-	ORANGE	32	50	42
32033	0.517	0.577	4/0 6/1	5557	7W	-	7W	-	6/1	-	3/0-6/1	6605	RED	34	25	30
32040	0.578	0.653	266.8 18/1	5464	19W	-	19W	-	18/1	-	-	-	BLACK	35	25	39

ALUMINUM CLAD STEEL DISTRIBUTION DEAD ENDS

Catalog Number	Diameter Range (inches)		Holding Strength (Lbs) Per Conductor Construction										Properties		Packaging per box		
	Min	Max	ACSR		All Aluminum		Aluminum Alloy		Compacted ACSR		Compacted All-Aluminum		Color " C "	Length (inches) " L "	Units	Weight (Lbs)	
			Type	MBS (Lbs)	Type	MBS (Lbs)	Type	MBS (Lbs)	Type	MBS (Lbs)	Type	MBS (Lbs)					
32060	0.654	0.739	336.4	18/1	6904	19W	-	19W	-	18/1	-	-	-	GREEN	39	25	50
32065	0.74	0.837	397.5	18/1	8024	19W	-	19W	-	18/1	-	-	-	ORANGE	50	10	45
32070	0.838	0.947	636	18/1	12272	37W	-	19W	-	18/1	-	-	-	BLUE	55	10	50
32080	0.948	1.071	666.6	36/1	11280	37W	-	37W	-	-	-	-	-	BROWN	62	5	40
32090	1.072	1.212	874.5	36/1	14320	61W	-	37W	-	-	-	-	-	ORANGE	70	5	48