


# GALVANIZED STEEL DROP WIRE SERVICE ENDS



Designed for use on : ACSR, All-Aluminum. Alluminum Alloy, Compacted ACSR, Compacted All-Aluminum.

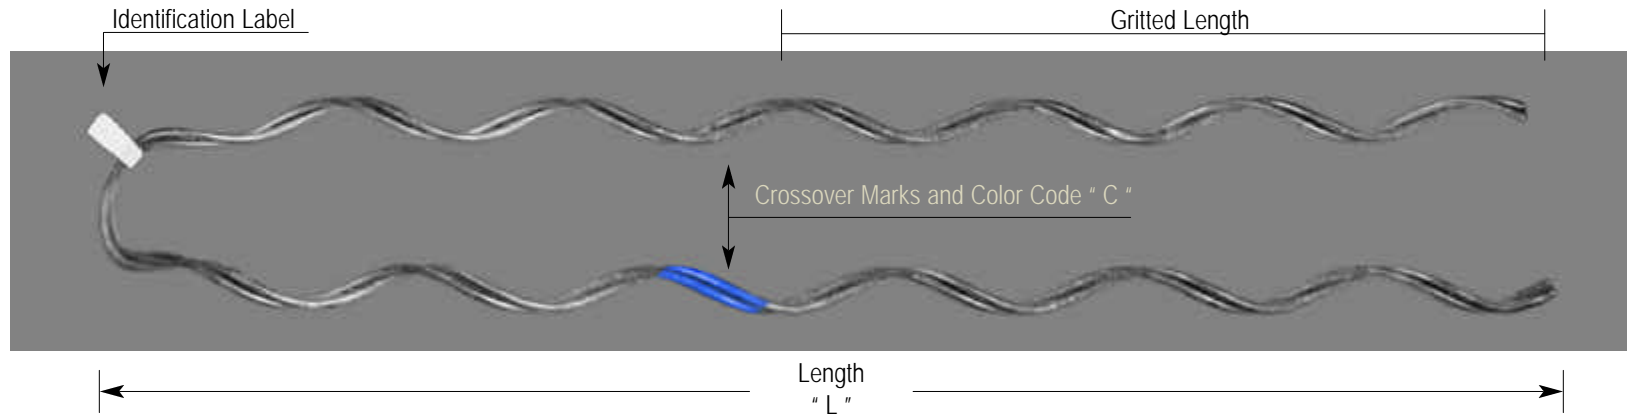


		Diameter Range		Holding Strength (Lbs) Per Conductor Construction										Packaging per box		Properties	
Catalog Number	Conductor Size AWG	Min	Max	ACSR		All Aluminum		Aluminum Alloy		Compacted ACSR		Compacted All-Aluminum		Units	Weight (Lbs)	Color	Length (inches)
				Type	MBS (Lbs)	Type	MBS (Lbs)	Type	MBS (Lbs)	Type	MBS (Lbs)	Type	MBS (Lbs)				
60100	#6	0.169	0.198	6/1	585	7W	488	7W	840	6/1	585	7W	500	100	8	BLUE	11
60200	#5	0.199	0.224	6/1	730	Solid	772	7W	1080			7W	788	100	9	WHITE	12
60300	#4	0.225	0.257	6/1	915	7W	770	7W	1336	6/1	915			100	10	ORANGE	13
60400	#3	0.258	0.289	6/1	1125	7W	900	7W	1720	6/1	1125	7W	1202	100	15	BLACK	14
60500	#2	0.29	0.325	6/1	1395	7W	1175	7W	2124	6/1	1395	7W	1383	100	16	RED	15
60600	#1	0.326	0.36	6/1	1740	7W	1430	7W	2736	6/1	1740	7W	1773	50	17	GREEN	17
60700	1/0	0.361	0.4	6/1	2140	7W	1734	7W	3384	6/1	2140	7W	2232	50	20	YELLOW	19
60800	2/0	0.401	0.45	6/1	2673	7W	2182	7W	4044	6/1	2673	7W	2705	50	23	BLUE	21
60900	3/0	0.451	0.51	6/1	3338	7W	2644	7W	5092	6/1	3338	7W	3411	50	25	ORANGE	23
60910	4/0	0.511	0.58	6/1	4210	7W	3335	7W	6420	6/1	4210	7W	3501	50	27	RED	26

# ALUMINUM CLAD STEEL DROP WIRE SERVICE ENDS



Designed for use on : ACSR, All-Aluminum. Alluminum Alloy, Compacted ACSR, Compacted All-Aluminum.

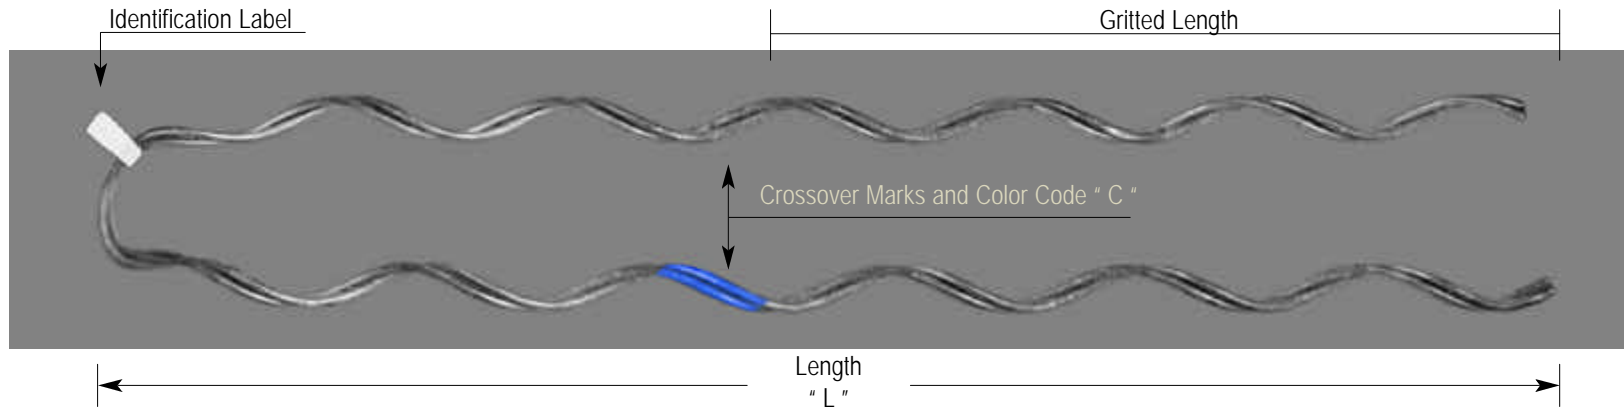

		Diameter Range		Holding Strength (Lbs) Per Conductor Construction										Packaging per box		Properties	
Catalog Number	Conductor Size AWG	Min	Max	ACSR		All Aluminum		Aluminum Alloy		Compacted ACSR		Compacted All-Aluminum		Units	Weight (Lbs)	Color	Length (inches)
				Type	MBS (Lbs)	Type	MBS (Lbs)	Type	MBS (Lbs)	Type	MBS (Lbs)	Type	MBS (Lbs)				
62100	#6	0.169	0.198	6/1	585	7W	488	7W	840	6/1	585	7W	500	100	8	BLUE	11
62200	#5	0.199	0.224	6/1	730	Solid	772	7W	1080			7W	788	100	9	WHITE	12
62300	#4	0.225	0.257	6/1	915	7W	770	7W	1336	6/1	915			100	10	ORANGE	13
62400	#3	0.258	0.289	6/1	1125	7W	900	7W	1720	6/1	1125	7W	1202	100	15	BLACK	14
62500	#2	0.29	0.325	6/1	1395	7W	1175	7W	2124	6/1	1395	7W	1383	100	16	RED	15
62600	#1	0.326	0.36	6/1	1740	7W	1430	7W	2736	6/1	1740	7W	1773	50	17	GREEN	17
62700	1/0	0.361	0.4	6/1	2140	7W	1734	7W	3384	6/1	2140	7W	2232	50	20	YELLOW	19
62800	2/0	0.401	0.45	6/1	2673	7W	2182	7W	4044	6/1	2673	7W	2705	50	23	BLUE	21
62900	3/0	0.451	0.51	6/1	3338	7W	2644	7W	5092	6/1	3338	7W	3411	50	25	ORANGE	23
62910	4/0	0.511	0.58	6/1	4210	7W	3335	7W	6420	6/1	4210	7W	3501	50	27	RED	26